


QP500 COIL take-up machine



PURCHASE NOTES

Parameters that buyers need to provide when purchasing:

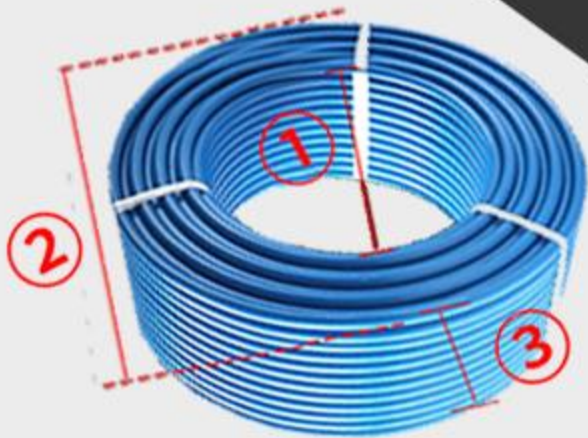


- ① Cable Coiling Head oD
- ② Cable Coiling Head iD
- ③ Width of cable Coiling

PRODUCT PARAMETERS

Model	QP500
Wire Diameter	φ0.1-30mm round wire flat wire tube and so on
Coil Inner Dia	120mm(optional)
Outer Diameter	400mm(optional)
Coil Height	40-100mm(60-150MM optional)
Take-up Speed	0-250RPM (customizable speed)
Wiring Mode	rolling ring drive
Load-Bearing	100kg
Motor Power	380V 4KW
Voltage	three phase power 380v 50hz
Package Size	1.32 * 1.32 * 1.52 m
weight	280kg

PRINCIPLE OF EXPANSION AND CONTRACTION

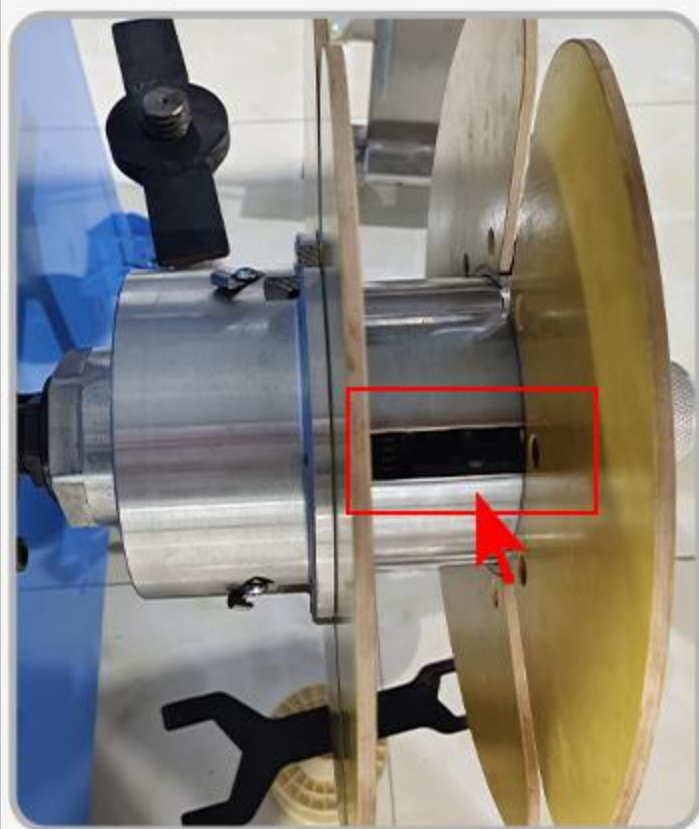

- ◆ The swell-diminution and demount can be finished within 2-3 seconds. The bundle can be easily packed and take out.

PRODUCT DESCRIPTION



Adjustable Fast Coiling Head



Nylon Fast Coiling Head

SIZE OF COIL HEAD

Inner Diameter	Width	Baffle Size
120	40-100MM	320MM
130	40-100MM	320MM
140	40-100MM	400MM
150	40-100MM	400MM
140	60-140MM	400MM
160	40-100MM	400MM
160	60-100MM	400/500MM
180	40-100MM	400/500MM
180	60-140MM	400/500MM
200	60-140MM	400/500MM
200	100-200MM	400/500MM
250	100-200MM	400/500MM
300	140-250MM	400/500MM
80/90	40-100MM	320MM
100	40-100MM	320MM

COIL EFFECT



PRODUCT DETAILS

1




Control Panel

2



Electric Cabinet

3

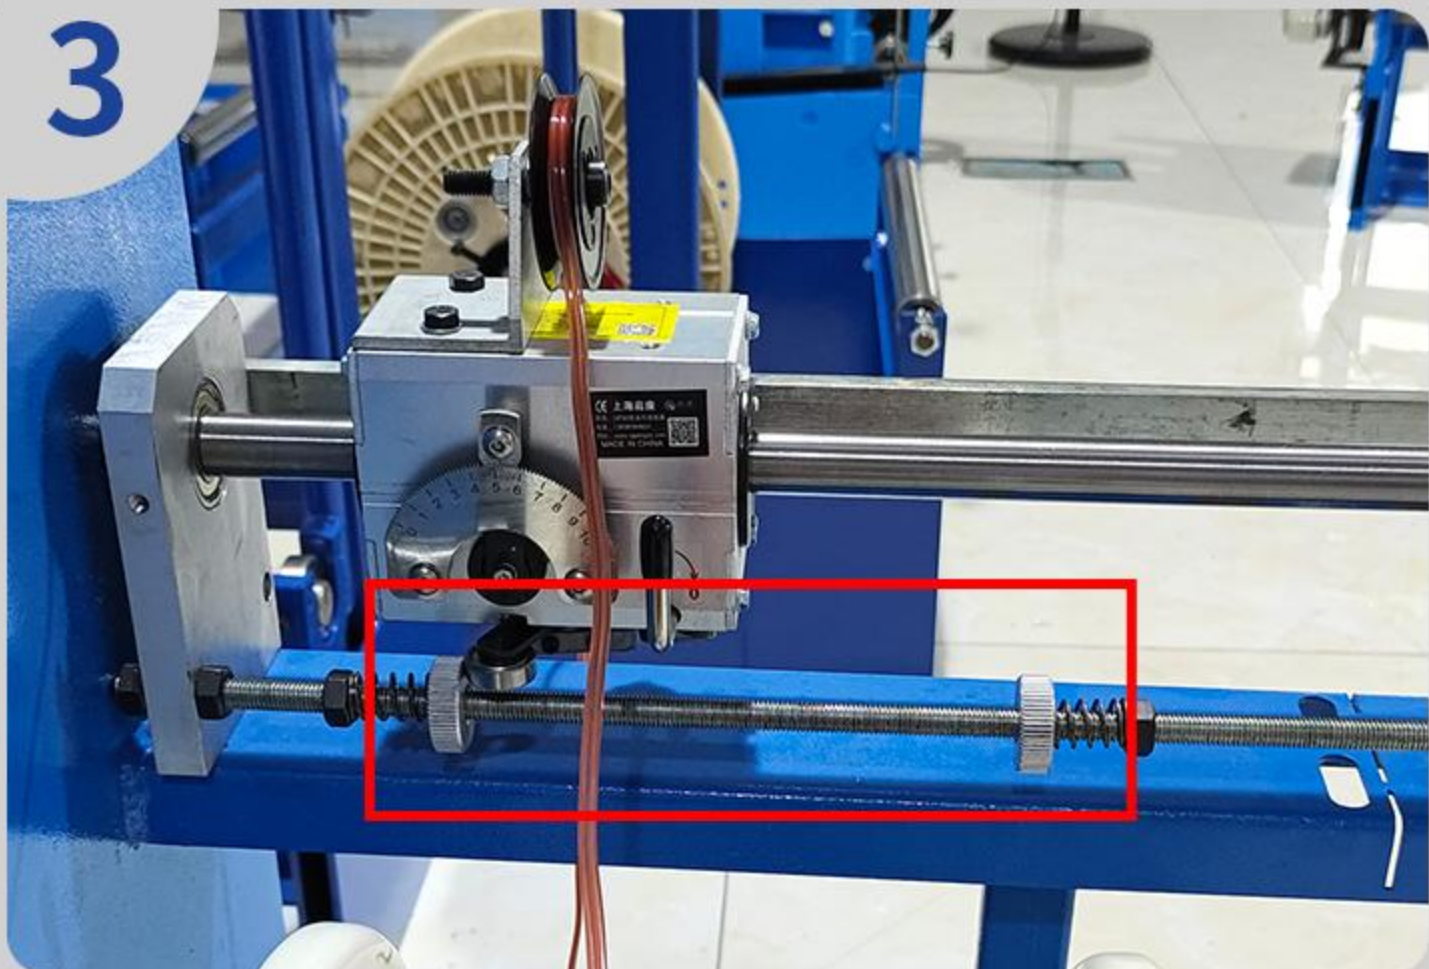

Light bar arranger with adjustable width for different bobbins

4



Flange link

PRODUCTION LINE APPLICATIONS





FACTORY PACKAGING



PRODUCT PICTURE





PRODUCT PICTURE





